

Unit-1

Computer Fundamentals

Objective:

- ❖ To impart in-depth knowledge of computer related basic terminologies.
- ❖ To inculcate the skills of implementation of basic theory in troubleshooting the software & hardware problems.

What is Computer?

Computer is an advanced electronic device that takes raw data as input from the user and processes these data under the control of set of instructions (called program) and gives the result (output) and saves output for the future use. It can process both numerical and non-numerical (arithmetic and logical) calculations.

A computer has four functions:	Input
a. accepts data	
b. processes data	Processing
c. produces output	Output
d. stores results	Storage

Input (Data):

Input is the raw information entered into a computer from the input devices. It is the collection of letters, numbers, images etc.

Process:

Process is the operation of data as per given instruction. It is totally internal process of the computer system.

Output:

Output is the processed data given by computer after data processing. Output is also called as Result. We can save these results in the storage devices for the future use.

Computer System

All of the components of a computer system can be summarized with the simple equations.

COMPUTER SYSTEM = HARDWARE + SOFTWARE+ USER

- Hardware = Internal Devices + Peripheral Devices
All physical parts of the computer (or everything that we can touch) are known as Hardware.
- Software = Programs
Software gives "intelligence" to the computer.
- USER = Person, who operates computer.

Generation of computer:

First Generation (1940-56):

The first generation computers used vacuum tubes & machine language was used for giving the instructions. These computer were large in size & their programming was difficult task. The electricity

consumption was very high. Some computers of this generation are ENIAC, EDVAC, EDSAC & UNIVAC-1.

Second Generation(1956-63):

In 2nd generation computers, vacuum tubes were replaced by transistors. They required only 1/10 of power required by tubes. This generation computers generated less heat & were reliable. The first operating system developed in this generation.

The Third Generation(1964-71):

The 3rd generation computers replaced transistors with Integrated circuit known as chip. From Small scale integrated circuits which had 10 transistors per chip, technology developed to MSI circuits with 100 transistors per chip. These computers were smaller, faster & more reliable. High level languages invented in this generation.


The fourth Generation(1972- present):

LSI & VLSI were used in this generation. As a result microprocessors came into existence. The computers using this technology known to be Micro Computers. High capacity hard disk were invented. There is great development in data communication.

The Fifth Generation (Present & Beyond):

Fifth generation computing devices, based on artificial intelligence, are still in development, though there are some applications, such as voice recognition, that are being used today. The use of parallel processing and superconductors is helping to make artificial intelligence a reality. Quantum computation and molecular and nanotechnology will radically change the face of computers in years to come.

ARCHITECTURE OF COMPUTER

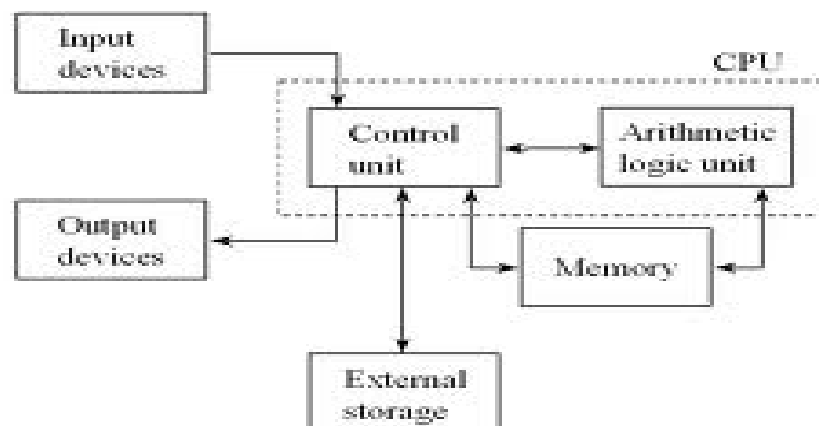


Input Devices: Those devices which help to enter data into computer system. Eg. Keyboard, Mouse, Touchscreen, Barcode Reader, Scanner, MICR, OMR etc.



Bar code Reader



MICR used in Bank



OMR(Used for answer sheet evaluation)

Output Devices: Those devices which help to display the processed information. Eg. Monitor, Printer, Plotter, Projector



Printer



Plotter



Projector

CENTRAL PROCESSING UNIT (CPU)

The main component to make a computer operate is the computer chip or microprocessor. This is referred to as the Central Processing Unit (CPU) and is housed in the computer case. Together, they are also called the CPU. It performs arithmetic and logic operations. The CPU (Central Processing Unit) is the device that interprets and executes instructions.



Processor

Memory: It facilitates the remembrance power to computer system. It refers to the physical devices used to store programs (sequences of instructions) or data (e.g. program state information) on a temporary or permanent basis for use in a computer or other digital electronic device. The term primary memory is used for the information in physical systems which are fast (i.e. RAM), as a distinction from secondary memory, which are physical devices for program and data storage which are slow to access but offer higher memory capacity. Primary memory stored on secondary memory is called virtual memory. Primary Memory can be categorized as Volatile Memory & Non-Volatile Memory.

Volatile memory(RAM)

Volatile memory is computer memory that requires power to maintain the stored information. Most modern semiconductor volatile memory is either Static RAM or dynamic RAM.

SRAM retains its contents as long as the power is connected and is easy to interface to but uses six transistors per bit.



Dynamic RAM is more complicated to interface to and control and needs regular refresh cycles to prevent its contents being lost. However, DRAM uses only one transistor and a capacitor per bit, allowing it to reach much higher densities and, with more bits on a memory chip, be much cheaper per bit. SRAM is not worthwhile for desktop system memory, where DRAM dominates, but is used for their cache memories..

Non Volatile Memory (ROM)

Non-volatile memory is computer memory that can retain the stored information even when not



powered.

Examples of non-volatile memory are flash memory and ROM/PROM/EPROM/EEPROM memory (used for firmware such as boot programs).

Cache Memory:

Cache memory is random access memory (RAM) that a computer microprocessor can access more quickly than it can access regular RAM. As the microprocessor processes data, it looks first in the cache memory and if it finds the data there (from a previous reading of data), it does not have to do the more time-consuming reading of data from larger memory. It is of two types- L1 cache is on the same chip as the microprocessor. L2 is usually a separate static RAM (SRAM) chip.

Secondary Memory:

- A. Hard Disk (Local Disk)
- B. Optical Disks: CD-R, CD-RW, DVD-R, DVD-RW
- C. Pen Drive
- D. Floppy Disks
- F. Memory Cards
- G. External Hard Disk
- H. Blu Ray Disk



Blu-Ray Disk:

Blu-ray (not Blue-ray) also known as Blu-ray Disc (BD), is the name of a new optical disc format. The format offers more than five times the storage capacity of traditional DVDs and can hold up to 25GB on a single-layer disc and 50GB on a dual-layer disc. While current optical disc technologies such as DVD, DVD±R, DVD±RW, and DVD-RAM rely on a red laser to read and write data, the new format uses a blue-violet laser instead, hence the name Blu-ray.



Units of Memory:

The smallest unit is bit, which mean either 0 or 1.

1 bit	= 0 or 1
1 Byte	= 8 bit
1 Nibble	= 4 bit
1 Kilo Byte	= 1024 Byte= 2^{10} Byte
1 Mega Byte	= 1024 KB= 2^{10} KB
1 Gega Byte	= 1024 MB= 2^{10} MB
1 Tera Byte	= 1024 GB= 2^{10} GB
1 Peta Byte	=1024 TB= 2^{10} TB
1 Exa Byte	=1024 PB= 2^{10} PB
1 Zetta Byte	= 1024 EB= 2^{10} EB
1 Yotta Byte	= 1024 ZB= 2^{10} ZB

Bootng

The process of loading the system files of the operating system from the disk into the computer memory to complete the circuitry requirement of the computer system is called booting.

Types of Booting:

There are two types of booting:

- **Cold Booting:** If the computer is in off state and we boot the computer by pressing the power switch 'ON' from the CPU box then it is called as cold booting.

- **Warm Booting:** If the computer is already 'ON' and we restart it by pressing the 'RESET' button from the CPU box or CTRL, ALT and DEL key simultaneously from the keyboard then it is called warm booting.

Types of Computer

On the basis of working principle

a) Analog Computer

An analog computer is a form of computer that uses *continuous* physical phenomena such as electrical, mechanical, or hydraulic quantities to model the problem being solved.

Eg: Thermometer, Speedometer, Petrol pump indicator, Multimeter



b) Digital Computer

A computer that performs calculations and logical operations with quantities represented as digits, usually in the binary number system.

c) Hybrid Computer (Analog + Digital)

A combination of computers those are capable of inputting and outputting in both digital and analog signals. A hybrid computer system setup offers a cost effective method of performing complex simulations. The instruments used in medical science lies in this category.

On the basis of Size

a) Super Computer

The fastest type of computer. Supercomputers are very expensive and are employed for specialized applications that require immense amounts of mathematical calculations. For example, weather forecasting requires a supercomputer. Other uses of supercomputers include animated graphics, fluid dynamic calculations, nuclear energy research, and petroleum exploration. PARAM, Pace & Flosolver are the supercomputer made in india.



b) Mainframe Computer

A very large and expensive computer capable of supporting hundreds, or even thousands, of users simultaneously. In the hierarchy that starts with a simple microprocessor (in watches, for example) at the bottom and moves to supercomputers at the top, mainframes are just below supercomputers. In some ways, mainframes are more powerful than supercomputers because they support more simultaneous programs. But supercomputers can execute a single program faster than a mainframe.



c) Mini Computer

A midsized computer. In size and power, minicomputers lie between *workstations* and *mainframes*. In the past decade, the distinction between large minicomputers and small mainframes has blurred, however, as has the distinction between small minicomputers and workstations. But in general, a minicomputer is a multiprocessing system capable of supporting from 4 to about 200 users simultaneously. Generally, servers are comes in this category.

d) Micro Computer

- i. **Desktop Computer:** a personal or micro-mini computer sufficient to fit on a desk.
- ii. **Laptop Computer:** a portable computer complete with an integrated screen and keyboard. It is generally smaller in size than a desktop computer and larger than a notebook computer.
- iii. **Palmtop Computer/Digital Diary /Notebook /PDAs:** a hand-sized computer. Palmtops have no keyboard but the screen serves both as an input and output device.

e) Workstations

A terminal or desktop computer in a network. In this context, workstation is just a generic term for a user's machine (client machine) in contrast to a "server" or "mainframe."



Software

Software, simply are the computer programs. The instructions given to the computer in the form of a program is called Software. Software is the set of programs, which are used for different purposes. All the programs used in computer to perform specific task is called Software.

Types of software

1. System software:

a) Operating System Software

DOS, Windows XP, Windows Vista, Unix/Linux, MAC/OS X etc.

b) Utility Software

Windows Explorer (File/Folder Management), Compression Tool, Anti-Virus Utilities, Disk Defragmentation, Disk Clean, BackUp, WinZip, WinRAR etc...

c) Language Processors

Compiler, Interpreter and Assembler

2. Application software:

a) Package Software

Ms. Office 2003, Ms. Office 2007, Macromedia (Dreamweaver, Flash, Freehand), Adobe (PageMaker, PhotoShop)

b) Tailored or Custom Software

School Management system, Inventory Management System, Payroll system, financial system etc.

Operating system

Operating system is a platform between hardware and user which is responsible for the management and coordination of activities and the sharing of the resources of a computer. It hosts the several applications that run on a computer and handles the operations of computer hardware.

Functions of operating System:

- Processor Management
- Memory Management
- File Management
- Device Management

Types of Operating System:

- **Real-time Operating System:** It is a multitasking operating system that aims at executing real-time applications. Example of Use: e.g. control of nuclear power plants, oil refining, chemical processing and traffic control systems, air

- **Single User Systems:** Provides a platform for only one user at a time. They are popularly associated with Desk Top operating system which run on standalone systems where no user accounts are required. Example: DOS.
- **Multi User Systems:** Provides regulated access for a number of users by maintaining a database of known users. Refers to computer systems that support two or more simultaneous users. Another term for multi-user is time sharing. Ex: All mainframes are multi-user systems. Example: Unix
- **Multi-tasking and Single-tasking Operating Systems:** When a single program is allowed to run at a time, the system is grouped under the single-tasking system category, while in case the operating system allows for execution of multiple tasks at a time, it is classified as a multi-tasking operating system.
- **Distributed Operating System:** An operating system that manages a group of independent computers and makes them appear to be a single computer is known as a distributed operating system. Distributed computations are carried out on more than one machine. When computers in a group work in cooperation, they make a distributed system.

Commonly used operating system

UNIX: Pronounced *yoo-niks*, a popular *multi-user*, *multitasking* operating system developed at Bell Labs in the early 1970s. UNIX was one of the first operating systems to be written in a high-level programming language, namely C. This meant that it could be installed on virtually any computer for which a C compiler existed.

LINUX: Pronounced *lee-nucks* or *lih-nucks*. A freely-distributable open source operating system that runs on a number of hardware platforms. The Linux kernel was developed mainly by Linus Torvalds and it is based on Unix. Because it's free, and because it runs on many platforms, including PCs and Macintoshes, Linux has become an extremely popular alternative to proprietary operating systems.

Windows: Microsoft Windows is a series of graphical interface operating systems developed, marketed, and sold by Microsoft. Microsoft introduced an operating environment named *Windows* on November 20, 1985 as an add-on to MS-DOS in response to the growing interest in graphical user interfaces (GUIs).^[2] Microsoft Windows came to dominate the world's personal computer market with over 90% market share, overtaking Mac OS, which had been introduced in 1984. The most recent client version of Windows is Windows 7; the most recent server version is Windows Server 2008 R2; the most recent mobile version is Windows Phone 7.5.

SOLARIS: Solaris is a Unix operating system originally developed by Sun Microsystems. It superseded their earlier SunOS in 1993. **Oracle Solaris**, as it is now known, has been owned by Oracle Corporation since Oracle's acquisition of Sun in January 2010.

BOSS: BOSS (Bharat Operating System Solutions) GNU/Linux distribution developed by C-DAC (Centre for Development of Advanced Computing) derived from Debian for enhancing the use of Free/Open Source Software throughout India. This release aims more at the security part and comes with an easy to use application to harden your Desktop.

Mobile OS: A mobile operating system, also called a mobile OS, is an operating system that is specifically designed to run on mobile devices such as mobile phones, smartphones, PDAs, tablet computers and other handheld devices. The mobile operating system is the software platform on top of which other programs, called application programs, can run on mobile devices.

- **Android:** Android is a Linux-based mobile phone operating system developed by Google. Android is unique because Google is actively developing the platform but giving it away for free to hardware manufacturers and phone carriers who want to use Android on their devices.
- **Symbian:** Symbian is a mobile operating system (OS) targeted at mobile phones that offers a high-level of integration with communication and personal information management (PIM) functionality. Symbian OS combines middleware with wireless communications through an integrated mailbox and the integration of Java and PIM functionality (agenda and contacts). The Symbian OS is open for third-party development by independent software vendors, enterprise IT departments, network operators and Symbian OS licensees.

LANGUAGE PROCESSORS: Since a computer hardware is capable of understanding only machine level instructions, So it is necessary to convert the HLL into Machine Level Language. There are three Language processors:

- Compiler:** It is translator which converts the HLL language into machine language in one go. A Source program in High Level Language get converted into Object Program in Machine Level Language.
- Interpreter:** It is a translator which converts the HLL language into machine language line by line. It takes one statement of HLL and converts it into machine code which is immediately executed. It eliminate the need of separate compilation/run. However, It is slow in processing as compare to compiler.
- Assembler:** It translate the assembly language into machine code.

Microprocessor:

A microprocessor is a semiconductor chip, which is manufactured using the Large Scale integration (LSI) or Very Large Scale Integration (VLSI), which comprises Arithmetic Logic Unit, Control unit and Central Processing Unit (CPU) fabricated on a single chip.


Terminologies:

Registers: A register is a very small amount of very fast memory that is built into the CPU (central processing unit) in order to speed up its operations by providing quick access to commonly used values. All data must be represented in a register before it can be processed. For example, if two numbers are to be multiplied, both numbers must be in registers, and the result is also placed in a register.

Bus:

A collection of wires through which data is transmitted from one part of a computer to another. You can think of a bus as a highway on which data travels within a computer. When used in reference to personal computers, the term *bus* usually refers to *internal bus*. This is a bus that connects all the internal computer components to the CPU and main memory. All buses consist of two parts -- an address bus and a data bus. The data bus transfers actual data whereas the address bus transfers information about where the data should go. The control bus is used by the CPU to direct and monitor the actions of the other functional areas of the computer. It is used to transmit a variety of individual signals (read, write, interrupt, acknowledge, and so forth) necessary to control and coordinate the operations of the computer.

The size of a bus, known as its *width*, is important because it determines how much data can be transmitted at one time. For example, a 16-bit bus can transmit 16 bits of data, whereas a 32-bit bus can transmit 32 bits

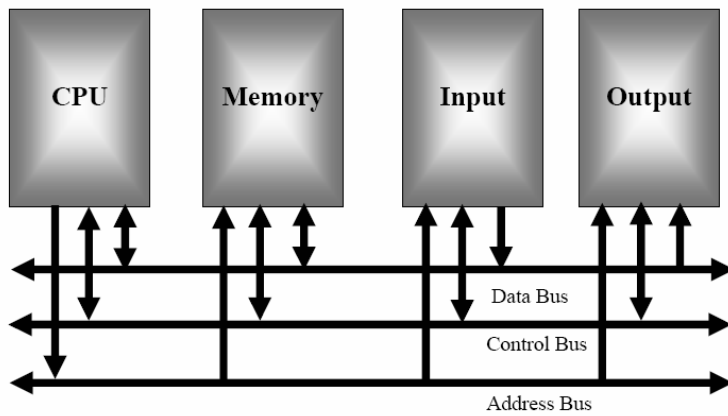

Clock speed: Also called *clock rate*, the speed at which a microprocessor executes instructions. Every computer contains an internal clock that regulates the rate at which instructions are executed and synchronizes all the various computer components. The CPU requires a fixed number of clock ticks (or *clock cycles*) to execute each instruction. The faster the clock, the more instructions the CPU can execute per second.

Clock speeds are expressed in megahertz (MHz) or gigahertz ((GHz).

16 bit Microprocessor: It indicates the width of the registers. A 16-bit microprocessor can process data and memory addresses that are represented by 16 bits. Eg. 8086 processor

32 bit Microprocessor: It indicates the width of the registers. A 32-bit microprocessor can process data and memory addresses that are represented by 32 bits. Eg. Intel 80386 processor, Intel 80486

64 bit Microprocessor: It indicates the width of the registers; a special high-speed storage area within the CPU. A 32-bit microprocessor can process data and memory addresses that are represented by 32 bits. Eg. Pentium dual core, core 2 duo.

128 bit Microprocessor: It indicates the width of the registers. A 128-bit microprocessor can process data and memory addresses that are represented by 128 bits. Eg. Intel core i7

Difference between RISC & CISC architecture

RISC (*Reduced Instruction Set Computing*):

1. RISC system has reduced number of instructions.
2. Performs only basic functions.
3. All HLL support is done in software.
4. All operations are register to register.

CISC (*Complex Instruction Set Computing*):

1. A large and varied instruction set.
2. Performs basic as well as complex functions.
3. All HLL support is done in Hardware.
4. Memory to memory addressing mode

EPIC (Explicitly Parallel Instruction Computing):

It is a 64-bit microprocessor instruction set, jointly defined and designed by Hewlett Packard and Intel, that provides up to 128 general and floating point unit registers and uses *speculative loading*, *predication*, and *explicit parallelism* to accomplish its computing tasks. By comparison, current 32-bit CISC and RISC microprocessor architectures depend on 32-bit registers, branch prediction, memory latency, and implicit parallelism, which are considered a less efficient approach in microarchitecture design.

PORTS: A port is an interface between the motherboard and an external device. Different types of port are available on motherboard as serial port, parallel port, PS/2 port, USB port, SCSI port etc.

Serial port(COM Port): A serial port transmit data one bit at a time. Typically on older PCs, a modem, mouse, or keyboard would be connected via serial ports. Serial cables are cheaper to make than parallel cables and easier to shield from interference. Also called communication port.

Parallel Port (LPT ports): It supports parallel communication i.e. it can send several bits simultaneously. It provides much higher data transfer speed in comparison with serial port. Also called Line Printer Port.

USB (Universal Serial Bus): It is a newer type of serial connection that is much faster than the old serial ports. USB is also much smarter and more versatile since it allows the "daisy chaining" of up to 127 USB peripherals connected to one port. It provides plug & play communication.

PS/2 Port : PS/2 ports are special ports for connecting the keyboard and mouse to some PC systems. This type of port was invented by IBM

FireWire Port : The IEEE 1394 interface, developed in late 1980s and early 1990s by Apple as FireWire, is a serial bus interface standard for high-speed communications and isochronous real-time data transfer. The 1394 interface is comparable with USB and often those two technologies are considered together, though USB has more market share.

Infrared Port: An IR port is a port which sends and receives infrared signals from other devices. It is a wireless type port with a limited range of 5-10ft.

Bluetooth: Bluetooth uses short-range radio frequencies to transmit information from fixed and mobile devices. These devices must be within the range of 32 feet, or 10 meters for Bluetooth to effectively work. A Bluetooth port enables connections for Bluetooth-enabled devices for synchronizing. Typically there are two types of ports: incoming and outgoing. The incoming port enables the device to receive connections from Bluetooth devices while the outgoing port makes connections to Bluetooth devices.

Internal Storage encoding of Characters:

ASCII(American standard code for information interchange): ASCII code is most widely used alphanumeric code used in computers. It is a 7- bit code, and so it has $2^7 = 128$ possible code groups. It represents all of the standard keyboard characters as well as control functions such as Return & Linefeed functions.

ISCII(American standard code for information interchange) : To use the Indian language on computers, ISCII codes are used. It is an 8-bit code capable of coding 256 characters. ISCII code retains all ASCII characters and offers coding for Indian scripts also.

Unicode: It is a universal coding standard which provides a unique number for every character, no matter what the platform, no matter what the program, no matter what the language. Unicode version 3.1 represented 94,140 characters.

NUMBER SYSTEM:

A. Decimal Number System:

Decimal Number system composed of 10 numerals or symbols. These numerals are 0 to 9. Using these symbols as digits we can express any quantity. It is also called base-10 system. It is a positional value system in which the value of a digit depends on its position.

These digits can represent any value, for example:

754.

The value is formed by the sum of each digit, multiplied by the **base** (in this case it is **10** because there are 10 digits in decimal system) in power of digit position (counting from zero):

$$7 \cdot 10^2 + 5 \cdot 10^1 + 4 \cdot 10^0 = 700 + 50 + 4 = 754$$

Decimal numbers would be written like this:

12710 1110 567310

B. Binary Number System:

In Binary Number system there are only two digits i.e. 0 or 1. It is base-2 system. It can be used to represent any quantity that can be represented in decimal or other number system. It is a positional value system, where each binary digit has its own value or weight expressed as power of 2.

The following are some examples of binary numbers:

101101₂ 11₂ 10110₂

Conversion from Decimal to Binary or Binary to Decimal

Convert from decimal to binary $X_{(10)} \rightarrow X_{(2)}$

Integer

$45_{(10)} \rightarrow X_{(2)}$

Div	Quotient	Remainder	Binary Number (X)
-----	----------	-----------	-------------------

45 / 2	22	1	1
--------	----	---	---

22 / 2	11	0	01
--------	----	---	----

11 / 2	5	1	101
--------	---	---	-----

5 / 2	2	1	1101
-------	---	---	------

2 / 2	1	0	01101
-------	---	---	-------

1 / 2	0	1	101101
-------	---	---	--------

$45_{(10)} \rightarrow 101101_{(2)}$

Fractional Part

$$0.182_{(10)} \rightarrow X_{(2)}$$

Div	Product	Integer value	Binary Number (X)
$0.182 * 2$	0.364	0	0.0
$0.364 * 2$	0.728	0	0.00
$0.728 * 2$	1.456	1	0.001
$0.456 * 2$	0.912	0	0.0010
$0.912 * 2$	1.824	1	0.00101
$0.824 * 2$	1.648	1	0.001011
$0.648 * 2$	1.296	1	0.0010111

$$0.182_{(10)} \rightarrow 0.0010111_{(2)} \text{ (After we round and cut the number)}$$

Conversion from Binary to Decimal

Convert from binary to decimal $X_{(2)} \rightarrow X_{(10)}$

$$101101.0010111_{(2)} \rightarrow X_{(10)}$$

Index the digits of the number

$$1^5 0^4 1^3 1^2 0^1 1^0 . 0^{-1} 0^{-2} 1^{-3} 0^{-4} 1^{-5} 1^{-6} 1^{-7}$$

Multiply each digit

$$1 * 2^5 + 0 * 2^4 + 1 * 2^3 + 1 * 2^2 + 0 * 2^1 + 1 * 2^0 + 0 * 2^{-1} + 0 * 2^{-2} + 1 * 2^{-3} + 0 * 2^{-4} + 1 * 2^{-5} + 1 * 2^{-6} + 1 * 2^{-7} =$$

$$32 + 0 + 8 + 4 + 0 + 1 + 0 + 0 + 0.125 + 0 + 0.03125 + 0.015625 + 0.007813$$

$$= 45.179688_{(10)}$$

C. Octal Number System:

It has eight unique symbols i.e. 0 to 7. It has base of 8. Each octal digit has its own value or weight expressed as a power of 8.

D. Hexadecimal Number System:

The hexadecimal system uses base 16. It has 16 possible digit symbols. It uses the digits 0 through 9 plus the letters A,B,C,D,E,F as 16 digit symbols. Each hexadecimal digit has its own value or weight expressed as a power of 16.

Table to remember

Decimal	Binary	Hexadecimal	Octal
0	0	0	0
1	1	1	1
2	10	2	2
3	11	3	3
4	100	4	4
5	101	5	5
6	110	6	6
7	111	7	7
8	1000	8	10
9	1001	9	11
10	1010	A	12
11	1011	B	13
12	1100	C	14
13	1101	D	15
14	1110	E	16
15	1111	F	17
16	10000	10	20

Convert from decimal to octal $X_{(10)} \rightarrow X_{(8)}$

Integer

$45_{(10)} \rightarrow X_{(8)}$

Div Quotient Remainder Octal Number (X)

45 / 8 5 5 **5**

5 / 8 0 5 **55**

$$45_{(10)} \rightarrow 55_{(8)}$$

Fractional Part

$$0.182_{(10)} \rightarrow X_{(8)}$$

Mul	Product	Integer	Binary Number (X)
0.182 * 8	1.456	1	0.1
0.456 * 8	3.648	3	0.13
0.648 * 8	5.184	5	0.135
0.184 * 8	1.472	1	0.1351
0.472 * 8	3.776	3	0.13513
0.776 * 8	6.208	6	0.135136

$$0.182_{(10)} \rightarrow 0.135136_{(8)} \text{ (After we round and cut the number)}$$

Convert from decimal to hexadecimal $X_{(10)} \rightarrow X_{(16)}$

Integer

$$45_{(10)} \rightarrow X_{(16)}$$

Div	Quotient	Remainder	Hex Number (X)
45 / 16	2	13	D (Since 13 decimal is D in hexadecimal)
2 / 16	0	2	2D (See the table)

$$45_{(10)} \rightarrow 2D_{(16)}$$

Fractional Number

$$0.182_{(10)} \rightarrow X_{(16)}$$

Mul	Product	Integer	Binary Number (X)
0.182 * 16	2.912	2	0.2
0.912 * 16	14.592	14	0.2E
0.592 * 16	9.472	9	0.2E9
0.472 * 16	7.552	7	0.2E97

0.552 * 16	8.832	8	0.2E978
0.832 * 16	13.312	13	0.2E978D

0.182₍₁₀₎ → 0.2E978D₍₁₆₎ (After we round and cut the number)

Convert from octal to decimal $X_{(8)} \rightarrow X_{(10)}$

55.135136₍₈₎ → $X_{(10)}$

Index the digits of the number

5¹5⁰.1⁻¹3⁻²5⁻³1⁻⁴3⁻⁵6⁻⁶

We multiply each digit

$$5 * 8^1 + 5 * 8^0 + 1 * 8^{-1} + 3 * 8^{-2} + 5 * 8^{-3} + 1 * 8^{-4} + 3 * 8^{-5} + 6 * 8^{-6} =$$

$$40 + 5 + 0.125 + 0.03125 + 0.009766 + 0.000244 + 0.0001 + 0.0000229$$

$$= 45.1663829_{(10)}$$

Convert from hexadecimal to decimal $X_{(16)} \rightarrow X_{(10)}$

2D.2E978D₍₁₆₎ → $X_{(10)}$

Index the digits of the number

2¹13⁰.2⁻¹14⁻²9⁻³7⁻⁴8⁻⁵13⁻⁶

We multiply each digit

$$2 * 16^1 + 13 * 16^0 + 2 * 16^{-1} + 14 * 16^{-2} + 9 * 16^{-3} + 7 * 16^{-4} + 8 * 16^{-5} + 13 * 16^{-6} =$$

$$32 + 13 + 0.125 + 0.0546875 + 0.00219727 + 0.00010681 + 0.00000762 + 0.00000077$$

$$= 45.18199997_{(10)}$$

Convert from binary to octal: For this conversion make the group of three digits from right to left before decimal & left to right after decimal then assign the specific octal value. (Given in the table above)

110101000.101010₍₂₎ → $X_{(8)}$

| 3 | | 3 | | 3 | | 3 | | 3 |

110 101 000 .101 010

|| || || || ||

V V V V V

6 5 0 . 5 2 (See that in the array $110_{(2)}$ corresponds to $6_{(8)}$)

$110101000.101010_{(2)} \rightarrow 650.52_{(8)}$

Convert from binary to hexadecimal: This conversion make the group of four digits from right to left before decimal & left to right after decimal then assign the specific Hexadecimal value. (Given in the table above)

$110101000.101010_{(2)} \rightarrow X_{(16)}$

| 4 | | 4 | | 4 | | 4 | | 4 |

0001 1010 1000 .1010 1000

|| || || || ||

V V V V V

1 A 8 . A 8

$110101000_{(2)} \rightarrow 1A8.A8_{(16)}$

Convert from hexadecimal to octal and binary: In this conversion write the binary of specific digit. For Octal three digit binary & for Hexadecimal four digit binary.

Convert from octal to binary

$650.52_{(8)} \rightarrow X_{(2)}$

6 5 0 . 5 2

|| || || || ||

V V V V V

110 101 000 . 101 010

$650.52_{(8)} \rightarrow 110101000.101010_{(2)}$

Convert from hexadecimal to binary

$1A8.A8_{(16)} \rightarrow X_{(2)}$

1 A 8 . A 8

|| || || || ||

V V V V V

0001 1010 1000 .1010 1000

Practice Session:

1. Which electronic device invention brought revolution in earlier computers?

Ans. Microprocessor

2. Which memory is responsible for booting of system.

Ans. ROM

3. Where do you find analog computers in daily life?

Ans. In Bike-speedometer, voltmeter

4. What do you mean by term firmware?

Ans. Software (programs or data) that has been written onto read-only memory (ROM). Firmware is a combination of software and hardware. ROMs, PROMs and EPROMs that have data or programs recorded on them are Firmware.

5. What do you mean by language processors? Why we need it? (Do yourself)

6. Give any example of hybrid computer in daily life.

Ans. In medical science- To measure the heart beat, blood pressure etc.

7. Can we think of a computer system without operating system? Justify your answer. (Do yourself)

8. Fifth generation of computer is a symbol of intelligence. Why?

Ans. Due to invention of robotics

9. Which is better for translator & why? Compiler or Interpreter. (Do yourself)

10. What do you mean by Defragmentation? (Do yourself)

11. What do you mean by RISC & CISC? (Do yourself)

12. Which port a mouse should be connected?

Ans. PS/2 port

13. What do you mean by LPT port?

Ans. Line Print Terminal

14. What is difference between USB & Firewire Port?

Ans. USB is host based, mean device must connect to computer while Firewire is peer-to-peer. Firewire is sought for high speed devices with more data like camcorders.

15. What is cache memory? (Do yourself)

16. Convert the followings:

- i. 101001.0101 to decimal
- ii. $(236)_8$ to Binary
- iii. $(266)_{10}$ to Hexadecimal
- iv. $(AF2)_{16}$ to Binary
- v. 0101110.1010110 to Hexadecimal